




CPA 123 & 124 Protective Covers

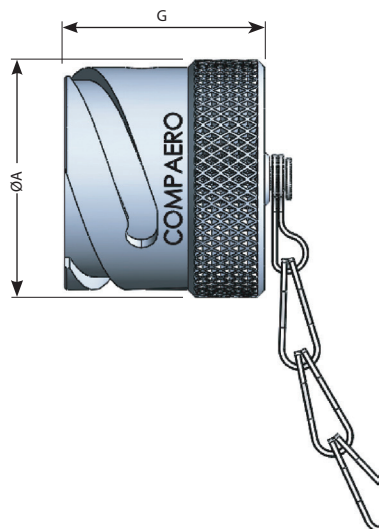

CPA 124 - Plug Cover

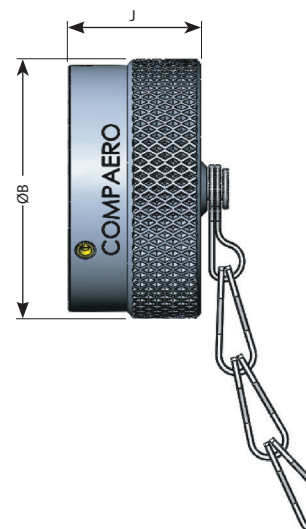

CPA 123 - Receptacle Cover

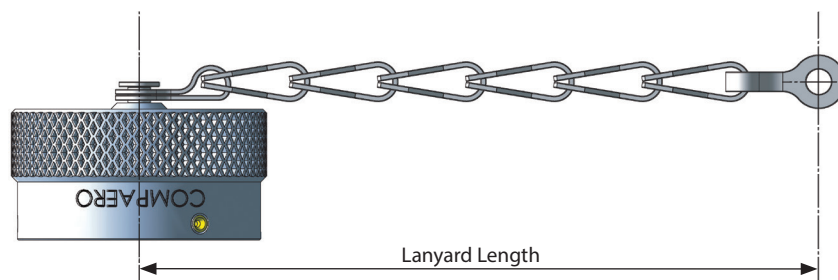

CPA 123-12 W-S5-22

Compaero Identifier

Series Identifier

124 : AS95234 PLUG
123 : AS95234 RECEPTACLE

Shell Size

Finish & Material
See Page 5

Eyelet or Ring Size

See Page 9
Enter "00" for a lanyard and length as specified with no eyelet or ring attached
(Suffix A for 30° Ring)

Lanyard Length in Inches (0.25" Increments Only)

For 5 Inches use "5"
For 4.5 Inches use "4.5"
For 4.25 Inches use "4.25"

Lanyard Style

X - No accessory
S - Stainless Steel Sash Chain
G - Nylon Rope, Black
GW - Nylon Rope, Green
Y - Stainless Steel Wire Rope, Nylon Jacket
T - Stainless Steel Wire Rope, Teflon Jacket
R - Stainless Steel Wire Rope, PVC Jacket
CF - Crimp Ferrule Option
TR - Tie-Wrap Option
B - Stainless Steel Bead Chain
(See Page 8)

Table 1 CPA 124 Plug Cover Dimensions

SHELL SIZE	ØA MAX.		G MAX.		APPROX. LANYARD LENGTH	
	in	mm	in	mm	in	mm
10SL	.827	21.00	1.142	29.00	4.252	108
12S	.930	23.60	1.142	29.00	4.252	108
14S	1.083	27.50	1.142	29.00	4.843	123
16S	1.181	30.00	1.142	29.00	4.843	123
16	1.181	30.00	1.142	29.00	4.843	123
18	1.319	35.50	1.457	37.00	4.843	123
20	1.457	37.00	1.457	37.00	5.433	138
22	1.575	40.00	1.457	37.00	5.433	138
24	1.713	43.50	1.457	37.00	5.433	138
28	1.949	49.50	1.457	37.00	8.110	206
32	2.205	56.00	1.457	37.00	8.110	206
36	2.461	62.50	1.457	37.00	8.110	206
40	2.665	67.70	1.457	37.00	8.110	206

Table 2 CPA 123 Receptacle Cover Dimensions

SHELL SIZE	ØB MAX.		J MAX.		APPROX. LANYARD LENGTH	
	in	mm	in	mm	in	mm
10SL	.925	23.50	.787	20.00	4.252	108
12S	1.050	26.20	.787	20.00	4.252	108
14S	1.201	30.50	.787	20.00	4.252	108
16S	1.299	33.00	.787	20.00	4.252	108
16	1.299	33.00	.984	25.00	4.843	123
18	1.476	37.50	.984	25.00	4.843	123
20	1.614	41.00	.984	25.00	4.843	123
22	1.732	44.00	.984	25.00	4.843	123
24	1.870	47.50	.984	25.00	4.843	123
28	2.146	54.50	.984	25.00	8.110	206
32	2.402	61.00	.984	25.00	8.110	206
36	2.657	67.50	.984	25.00	8.110	206
40	2.874	73.00	.984	25.00	8.110	206

Lanyard Options

S-Stainless steel Sash chain




B-Stainless Steel Bead Chain




G-Nylon Rope, Black




CF-Crimp Ferrule Option

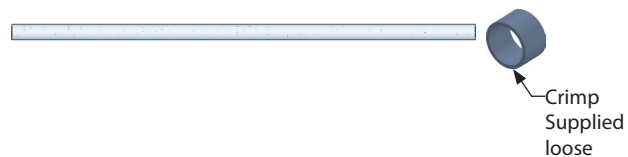

TR-Tie Wrap Option

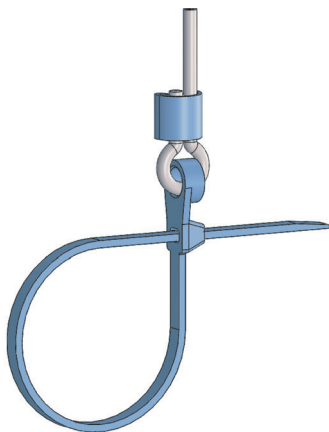

X-No Accessory

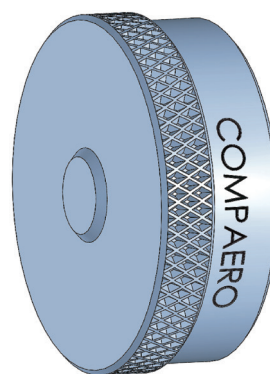

Solid Rings

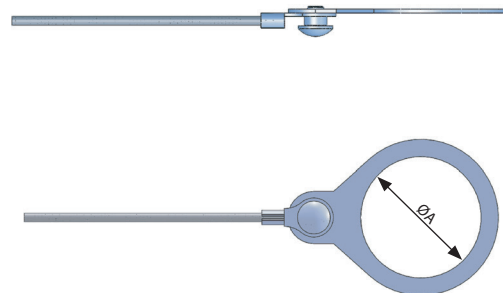
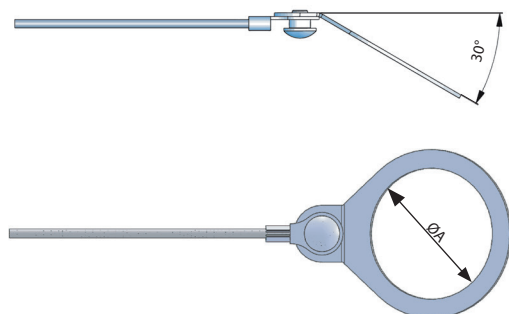


Table 4 Ring Specification

Ring	$\varnothing A$		Ring 30°	$\varnothing A$	
	in	mm		in	mm
20	.512	13.00	20A	.512	13.00
21	.591	15.01	21A	.591	15.01
22	.724	18.38	22A	.724	18.38
23	.787	20.00	23A	.787	20.00
24	.913	23.19	24A	.913	23.19
25	1.043	26.49	25A	1.043	26.49
26	1.193	30.30	26A	1.193	30.30
27	1.283	32.58	27A	1.283	32.58
28	1.437	36.49	28A	1.437	36.49
29	1.547	39.29	29A	1.547	39.29
30	1.689	42.90	30A	1.689	42.90
31	1.772	45.00	31A	1.772	45.00
32	1.890	48.00	32A	1.890	48.00
33	2.140	54.40	33A	2.140	54.40
34	2.406	61.10	34A	2.406	61.10
35	2.656	67.50	35A	2.656	67.50

Eyelet

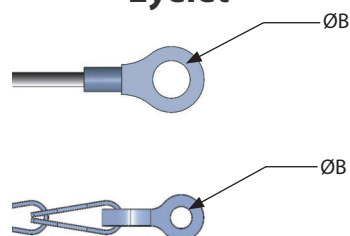


Table 3 Eyelet Specifications

Eyelet	$\varnothing B$
00	No Eyelet or Ring
01	0.140
02	0.167
03	0.197
04	0.125
05	0.156
06	0.182
07	0.191
08	0.218