




CPA 32 & 33 Protective Covers

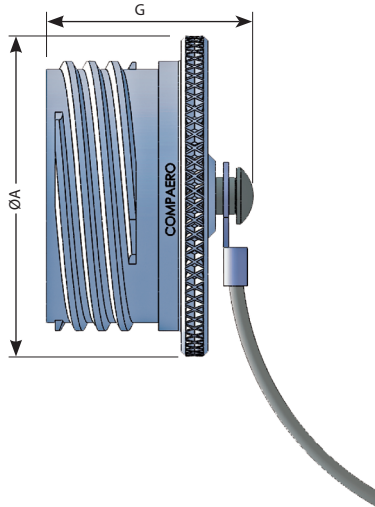

CPA 32 - Plug Cover

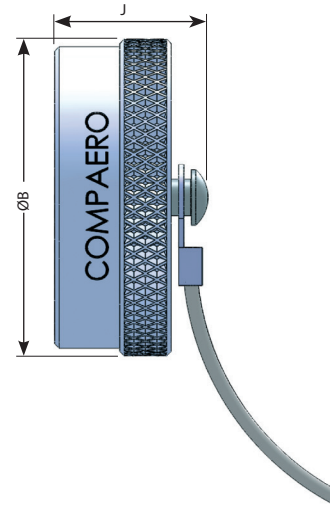

CPA 33 - Receptacle Cover

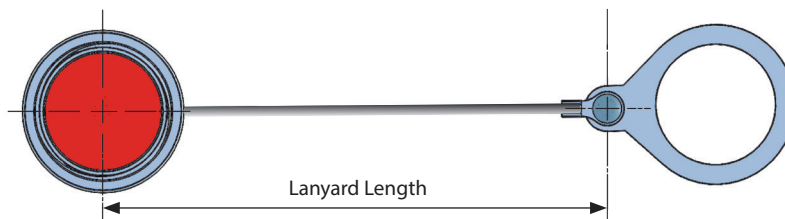

CPA 32-13 W-S5-22

Compaero Identifier		Eyelet or Ring Size
Series Identifier		See Page 9
32 : D38999 SERIES 3 PLUG		Enter "00" for a lanyard and length as specified with no eyelet or ring attached (Suffix A for 30" Ring)
33 : D38999 SERIES 3 RECEPTACLE		
Shell Size		Lanyard Length in Inches (0.25" Increments Only)
Finish & Material		For 5 Inches use "5"
See Page 5		For 4.5 Inches use "4.5"
		For 4.25 Inches use "4.25"
		Lanyard Style
		X - No accessory
		S - Stainless Steel Sash Chain
		G - Nylon Rope, Black
		GW - Nylon Rope, Green
		Y - Stainless Steel Wire Rope, Nylon Jacket
		T - Stainless Steel Wire Rope, Teflon Jacket
		R - Stainless Steel Wire Rope, PVC Jacket
		CF - Crimp Ferrule Option
		TR - Tie-Wrap Option
		B - Stainless Steel Bead Chain
		(See Page 8)

Table 1 CPA 32 Plug Cover Dimensions

SHELL SIZE	ØA MAX.		G MAX.		STD. LANYARD LENGTH*	
	in	mm	in	mm	in	mm
9	.91	23.00	1.18	30.00	5.00	127.00
11	1.02	26.00	1.18	30.00	5.00	127.00
13	1.22	31.00	1.18	30.00	5.00	127.00
15	1.30	33.00	1.18	30.00	5.00	127.00
17	1.46	37.00	1.18	30.00	5.00	127.00
19	1.57	40.00	1.18	30.00	5.00	127.00
21	1.73	44.00	1.18	30.00	5.00	127.00
23	1.81	46.00	1.18	30.00	5.00	127.00
25	1.97	50.00	1.18	30.00	5.00	127.00

* Tolerances for lanyard Length
inches: $\pm .51 / - .28$
millimeters: $\pm 13.0 / - 7.0$

Table2 CPA 33 Receptacle Cover Dimensions

SHELL SIZE	ØB MAX.		J MAX.		STD. LANYARD LENGTH*	
	in	mm	in	mm	in	mm
9	.91	23.00	.91	23.00	5.00	127.00
11	1.10	28.00	.91	23.00	5.00	127.00
13	1.22	31.00	.91	23.00	5.00	127.00
15	1.26	32.00	.91	23.00	5.00	127.00
17	1.46	37.00	.91	23.00	5.00	127.00
19	1.54	39.00	.91	23.00	5.00	127.00
21	1.65	42.00	.91	23.00	5.00	127.00
23	1.77	45.00	.91	23.00	5.00	127.00
25	1.93	49.00	.91	23.00	5.00	127.00

* Tolerances for lanyard Length
inches: $\pm .51 / - .28$
millimeters: $\pm 13.0 / - 7.0$

Lanyard Options

S-Stainless steel Sash chain




B-Stainless Steel Bead Chain




G-Nylon Rope, Black




CF-Crimp Ferrule Option

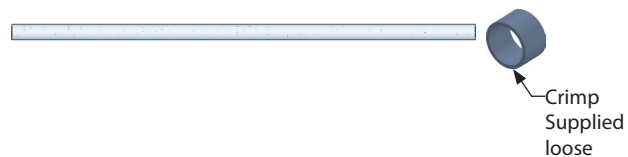

TR-Tie Wrap Option

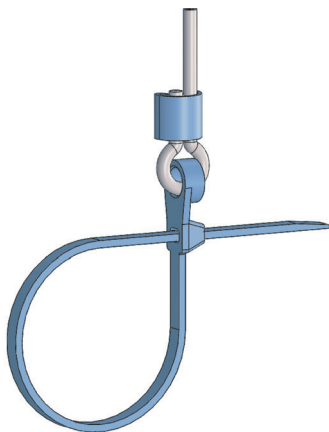

X-No Accessory

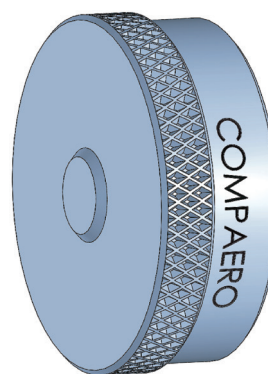

Solid Rings

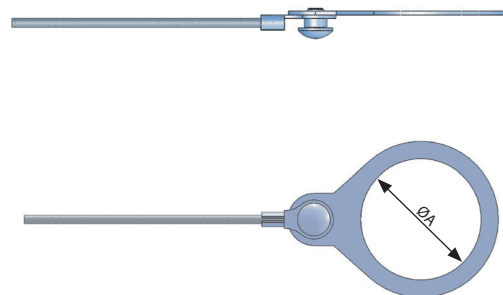
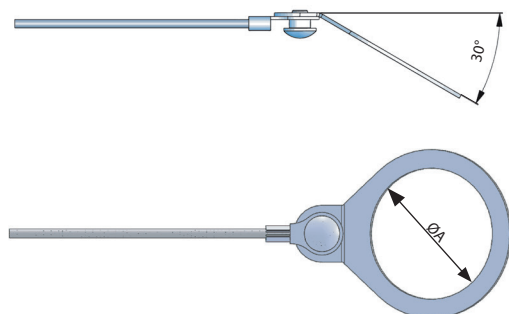


Table 4 Ring Specification

Ring	$\varnothing A$		Ring 30°	$\varnothing A$	
	in	mm		in	mm
20	.512	13.00	20A	.512	13.00
21	.591	15.01	21A	.591	15.01
22	.724	18.38	22A	.724	18.38
23	.787	20.00	23A	.787	20.00
24	.913	23.19	24A	.913	23.19
25	1.043	26.49	25A	1.043	26.49
26	1.193	30.30	26A	1.193	30.30
27	1.283	32.58	27A	1.283	32.58
28	1.437	36.49	28A	1.437	36.49
29	1.547	39.29	29A	1.547	39.29
30	1.689	42.90	30A	1.689	42.90
31	1.772	45.00	31A	1.772	45.00
32	1.890	48.00	32A	1.890	48.00
33	2.140	54.40	33A	2.140	54.40
34	2.406	61.10	34A	2.406	61.10
35	2.656	67.50	35A	2.656	67.50

Eyelet

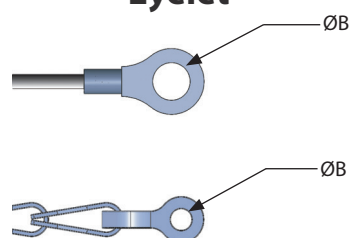


Table 3 Eyelet Specifications

Eyelet	$\varnothing B$
00	No Eyelet or Ring
01	0.140
02	0.167
03	0.197
04	0.125
05	0.156
06	0.182
07	0.191
08	0.218