




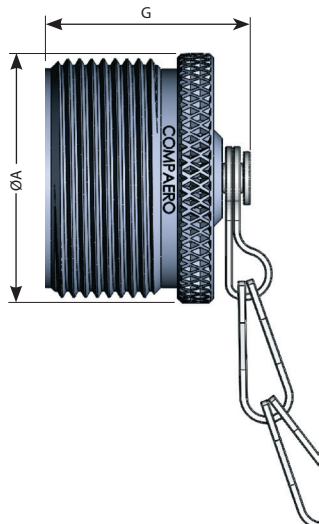

CPA 42 - Plug Cover

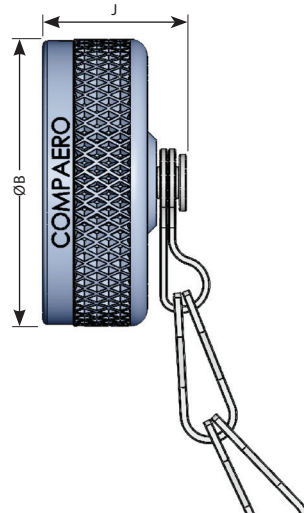

CPA 43 - Receptacle Cover

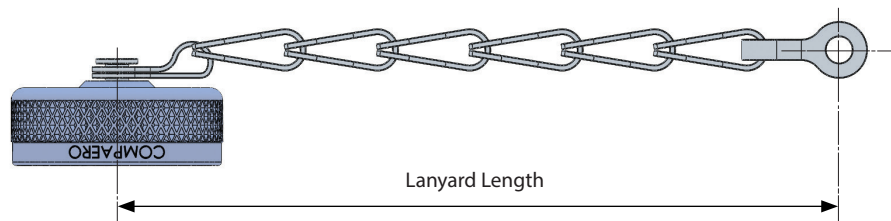

CPA 43-12 W-S5-22

Compaero Identifier

Series Identifier

42 : MIL-DTL-5015 PLUG
43 : MIL-DTL-5015 RECEPTACLE

Shell Size

Finish & Material
See Page 5

Eyelet or Ring Size

See Page 9
Enter "00" for a lanyard and length as specified with no eyelet or ring attached
(Suffix A for 30° Ring)

Lanyard Length in Inches (0.25" Increments Only)

For 5 Inches use "5"
For 4.5 Inches use "4.5"
For 4.25 Inches use "4.25"

Lanyard Style

X - No accessory
S - Stainless Steel Sash Chain
G - Nylon Rope, Black
GW - Nylon Rope, Green
Y - Stainless Steel Wire Rope, Nylon Jacket
T - Stainless Steel Wire Rope, Teflon Jacket
R - Stainless Steel Wire Rope, PVC Jacket
CF - Crimp Ferrule Option
TR - Tie-Wrap Option
B - Stainless Steel bead Chain
(See Page 8)

Table 1 CPA 42 Plug Cover Dimensions

SHELL SIZE	ØA MAX.		G MAX.		STD. LANYARD LENGTH*	
	in	mm	in	mm	in	mm
08	.562	14.27	.969	24.61	4.0	101.60
10	.687	17.45	.969	24.61	4.0	101.60
12	.812	20.62	1.156	29.36	4.5	114.30
14	.937	23.80	1.156	29.36	4.5	114.30
16	1.062	26.97	1.156	29.36	4.5	114.30
18	1.187	30.15	1.156	29.36	4.5	114.30
20	1.312	33.32	1.156	29.36	5.0	127.00
22	1.437	36.50	1.156	29.36	5.0	127.00
24	1.562	39.67	1.156	29.36	5.5	139.70
28	1.812	46.02	1.156	29.36	7.75	196.85
32	2.062	52.37	1.156	29.36	7.75	196.85
36	2.312	58.72	1.156	29.36	7.75	196.85
40	2.562	65.07	1.156	29.36	7.75	196.85
44	2.812	71.42	1.156	29.36	7.75	196.85
48	3.062	77.77	1.156	29.36	7.75	196.85

* Tolerances for lanyard Length : ± one link

Table 2 CPA 43 Receptacle Cover Dimensions

SHELL SIZE	ØB MAX.		J MAX.		STD. LANYARD LENGTH*	
	in	mm	in	mm	in	mm
08	.688	17.48	.750	19.05	4.0	101.60
10	.815	20.70	.750	19.05	4.0	101.60
12	1.000	25.40	.750	19.05	4.5	114.30
14	1.125	28.58	.750	19.05	4.5	114.30
16	1.188	30.18	.750	19.05	4.5	114.30
18	1.344	34.14	.750	19.05	4.5	114.30
20	1.469	37.31	.750	19.05	5.0	127.00
22	1.594	40.49	.750	19.05	5.0	127.00
24	1.719	43.66	.750	19.05	5.5	139.70
28	1.969	50.01	.812	20.62	7.75	196.90
32	2.219	56.36	.812	20.62	7.75	196.90
36	2.469	62.71	.812	20.62	7.75	196.90
40	2.719	69.06	.812	20.62	7.75	196.90
44	2.969	75.41	.812	20.62	7.75	196.90
48	3.188	80.98	.812	20.62	7.75	196.90

* Tolerances for lanyard Length : ± one link

Lanyard Options

S-Stainless steel Sash chain




B-Stainless Steel Bead Chain




G-Nylon Rope, Black




CF-Crimp Ferrule Option

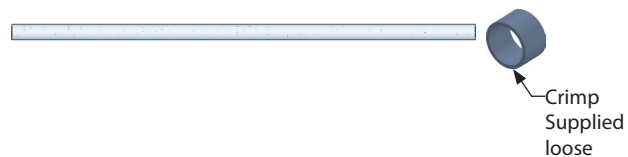

TR-Tie Wrap Option

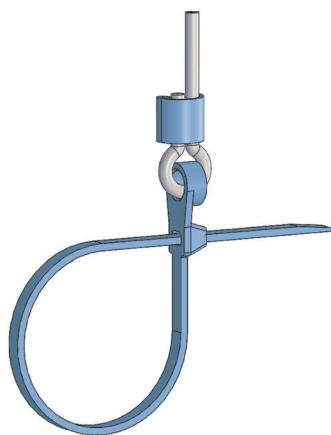

X-No Accessory

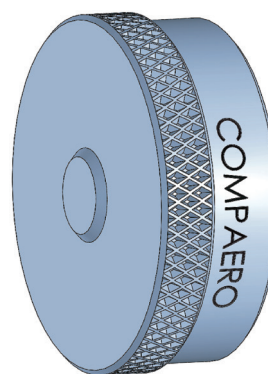

Solid Rings

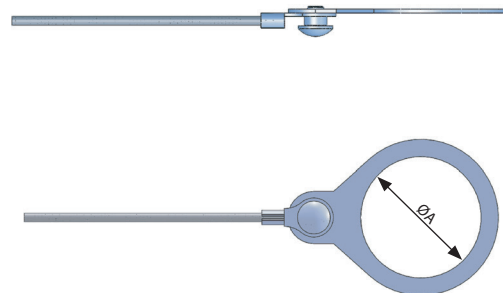
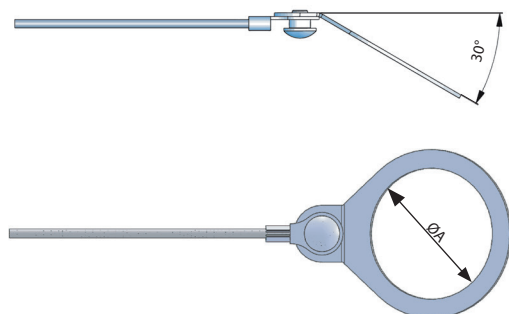


Table 4 Ring Specification

Ring	$\varnothing A$		Ring 30°	$\varnothing A$	
	in	mm		in	mm
20	.512	13.00	20A	.512	13.00
21	.591	15.01	21A	.591	15.01
22	.724	18.38	22A	.724	18.38
23	.787	20.00	23A	.787	20.00
24	.913	23.19	24A	.913	23.19
25	1.043	26.49	25A	1.043	26.49
26	1.193	30.30	26A	1.193	30.30
27	1.283	32.58	27A	1.283	32.58
28	1.437	36.49	28A	1.437	36.49
29	1.547	39.29	29A	1.547	39.29
30	1.689	42.90	30A	1.689	42.90
31	1.772	45.00	31A	1.772	45.00
32	1.890	48.00	32A	1.890	48.00
33	2.140	54.40	33A	2.140	54.40
34	2.406	61.10	34A	2.406	61.10
35	2.656	67.50	35A	2.656	67.50

Eyelet

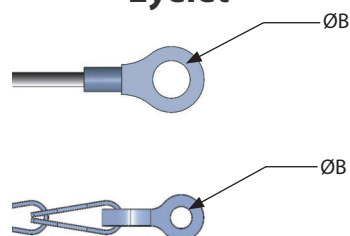


Table 3 Eyelet Specifications

Eyelet	$\varnothing B$
00	No Eyelet or Ring
01	0.140
02	0.167
03	0.197
04	0.125
05	0.156
06	0.182
07	0.191
08	0.218