




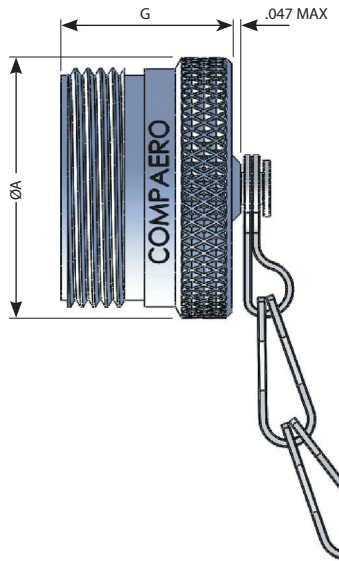

CPA 591 - Plug Cover

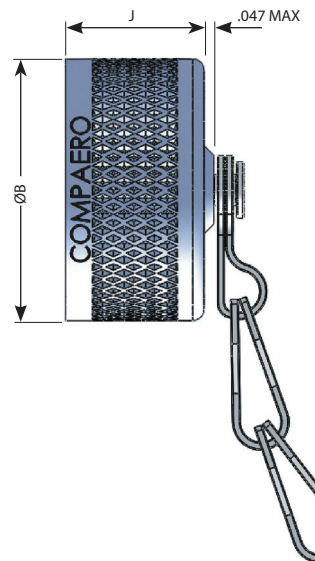

CPA 601 - Receptacle Cover

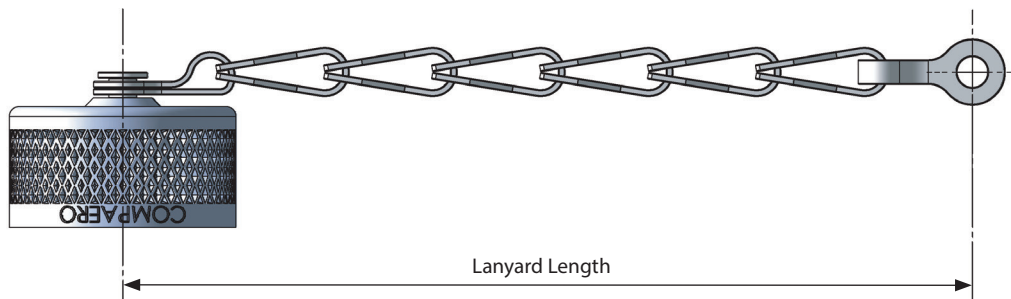

CPA 591-12 W-S5-22

Compaero Identifier

Series Identifier

591: MIL-DTL-83723 SERIES 3 THREADED PLUG
601: MIL-DTL-83723 SERIES 3 THREADED RECEPTACLE

Shell Size

Finish & Material

See Page 5

Eyelet or Ring Size

See Page 9

Enter "00" for a lanyard and length as specified with no eyelet or ring attached (Suffix A for 30° Ring)

Lanyard Length in Inches (0.25" Increments Only)

For 5 Inches use "5"
For 4.5 Inches use "4.5"
For 4.25 Inches use "4.25"

Lanyard Style

X - No accessory
S - Stainless Steel Sash Chain
G - Nylon Rope, Black
GW - Nylon Rope, Green
Y - Stainless Steel Wire Rope, Nylon Jacket
T - Stainless Steel Wire Rope, Teflon Jacket
R - Stainless Steel Wire Rope, PVC Jacket
CF - Crimp Ferrule Option
TR - Tie-Wrap Option
B - Stainless Steel Bead Chain
(See Page 8)

Table 1 CPA 591 Plug Cover Dimensions

SHELL SIZE	ØA MAX.		G MAX.		STD. LANYARD LENGTH 1*		STD. LANYARD LENGTH 2*	
	in	mm	in	mm	in	mm	in	mm
08	.776	19.71	.767	19.48	5.00	127.00	8.00	203.20
10	.906	23.01	.767	19.48	5.00	127.00	8.00	203.20
12	1.078	27.38	.767	19.48	5.00	127.00	8.00	203.20
14	1.141	28.98	.767	19.48	5.00	127.00	8.00	203.20
16	1.266	32.16	.767	19.48	5.00	127.00	8.00	203.20
18	1.375	34.93	.767	19.48	5.00	127.00	8.00	203.20
20	1.510	38.35	.767	19.48	5.00	127.00	8.00	203.20
22	1.625	41.28	.767	19.48	5.00	127.00	8.00	203.20
24	1.760	44.70	.767	19.48	5.00	127.00	8.00	203.20

* Tolerances for lanyard Length
inches $\pm .25$
millimeters: ± 6.35

Table 2 CPA 601 Receptacle Cover Dimensions

SHELL SIZE	ØB MAX.		J MAX.		STD. LANYARD LENGTH 1*		STD. LANYARD LENGTH 2*	
	in	mm	in	mm	in	mm	in	mm
08	.776	19.71	.618	15.70	5.00	127.00	8.00	203.20
10	.906	23.01	.618	15.70	5.00	127.00	8.00	203.20
12	1.078	27.38	.618	15.70	5.00	127.00	8.00	203.20
14	1.141	28.98	.618	15.70	5.00	127.00	8.00	203.20
16	1.266	32.16	.618	15.70	5.00	127.00	8.00	203.20
18	1.375	34.93	.618	15.70	5.00	127.00	8.00	203.20
20	1.510	38.35	.618	15.70	5.00	127.00	8.00	203.20
22	1.625	41.28	.618	15.70	5.00	127.00	8.00	203.20
24	1.760	44.70	.618	15.70	5.00	127.00	8.00	203.20

* Tolerances for lanyard Length
inches $\pm .25$
millimeters: ± 6.35

Lanyard Options

S-Stainless steel Sash chain




B-Stainless Steel Bead Chain




G-Nylon Rope, Black




CF-Crimp Ferrule Option

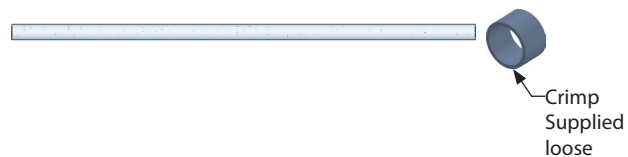

TR-Tie Wrap Option

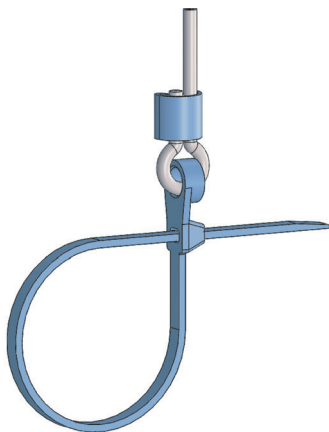

X-No Accessory

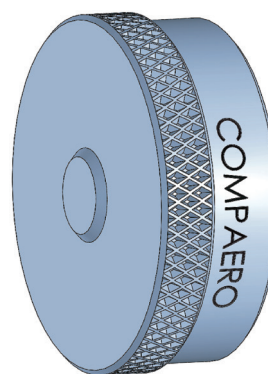

Solid Rings

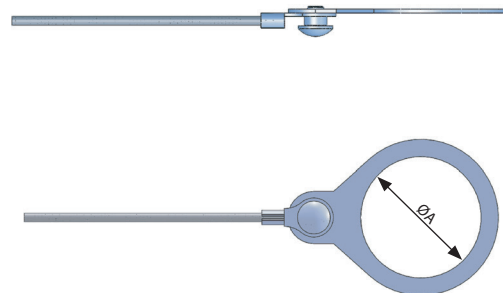
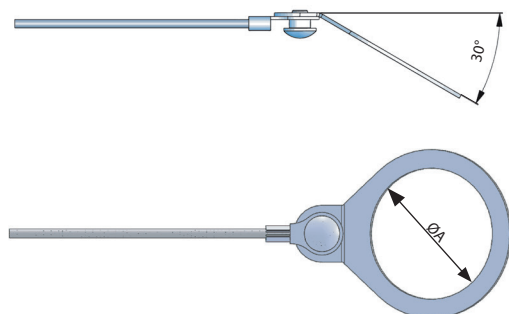


Table 4 Ring Specification

Ring	$\varnothing A$		Ring 30°	$\varnothing A$	
	in	mm		in	mm
20	.512	13.00	20A	.512	13.00
21	.591	15.01	21A	.591	15.01
22	.724	18.38	22A	.724	18.38
23	.787	20.00	23A	.787	20.00
24	.913	23.19	24A	.913	23.19
25	1.043	26.49	25A	1.043	26.49
26	1.193	30.30	26A	1.193	30.30
27	1.283	32.58	27A	1.283	32.58
28	1.437	36.49	28A	1.437	36.49
29	1.547	39.29	29A	1.547	39.29
30	1.689	42.90	30A	1.689	42.90
31	1.772	45.00	31A	1.772	45.00
32	1.890	48.00	32A	1.890	48.00
33	2.140	54.40	33A	2.140	54.40
34	2.406	61.10	34A	2.406	61.10
35	2.656	67.50	35A	2.656	67.50

Eyelet

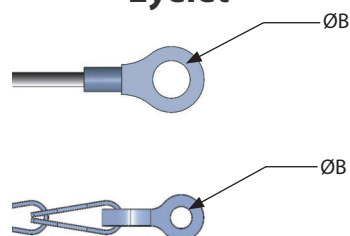


Table 3 Eyelet Specifications

Eyelet	$\varnothing B$
00	No Eyelet or Ring
01	0.140
02	0.167
03	0.197
04	0.125
05	0.156
06	0.182
07	0.191
08	0.218