




# CPA 592 & 602 Protective Covers

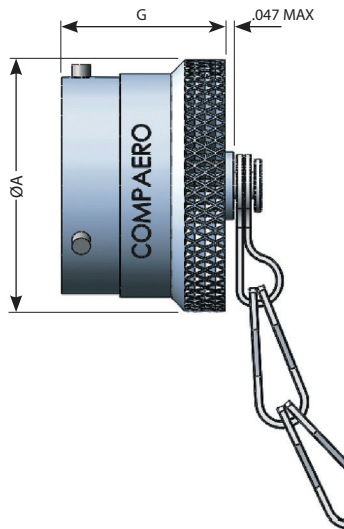

**CPA 592 - Plug Cover**

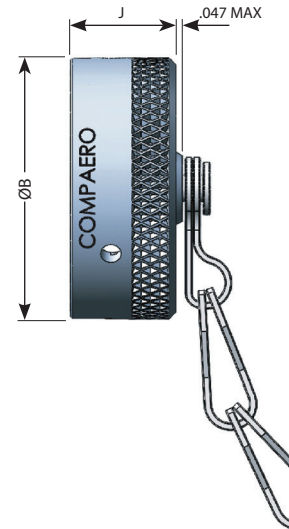

**CPA 602 - Receptacle Cover**

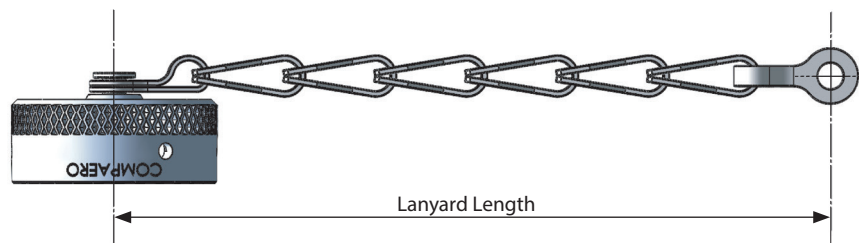

## CPA 592-12 W-S5-22

|                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                  |
|------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Compaero Identifier</b>                                                               | <b>Eyelet or Ring Size</b><br>See Page 9<br>Enter "00" for a lanyard and length as specified with no eyelet or ring attached<br>(Suffix A for 30° Ring)                                                                                                                                                                                                                          |
| <b>Series Identifier</b><br>592: D38999 SERIES 4 PLUG<br>602: D38999 SERIES 4 RECEPTACLE | <b>Lanyard Length in Inches (0.25" Increments Only)</b><br>For 5 Inches use "5"<br>For 4.5 Inches use "4.5"<br>For 4.25 Inches use "4.25"                                                                                                                                                                                                                                        |
| <b>Shell Size</b>                                                                        | <b>Lanyard Style</b><br>X - No accessory<br>S - Stainless Steel Sash Chain<br>G - Nylon Rope, Black<br>GW - Nylon Rope, Green<br>Y - Stainless Steel Wire Rope, Nylon Jacket<br>T - Stainless Steel Wire Rope, Teflon Jacket<br>R - Stainless Steel Wire Rope, PVC Jacket<br>CF - Crimp Ferrule Option<br>TR - Tie-Wrap Option<br>B - Stainless Steel Bead Chain<br>(See Page 8) |
| <b>Finish &amp; Material</b><br>See Page 5                                               |                                                                                                                                                                                                                                                                                                                                                                                  |

**Table 1 CPA 592 Plug Cover Dimensions**

| SHELL SIZE | ØA MAX. |       | G MAX. |       | STD. LANYARD LENGTH 1* |        | STD. LANYARD LENGTH 2* |        |
|------------|---------|-------|--------|-------|------------------------|--------|------------------------|--------|
|            | in      | mm    | in     | mm    | in                     | mm     | in                     | mm     |
| 8          | .766    | 19.46 | .767   | 19.48 | 5.00                   | 127.00 | 8.00                   | 203.20 |
| 10         | .906    | 23.01 | .767   | 19.48 | 5.00                   | 127.00 | 8.00                   | 203.20 |
| 12         | 1.078   | 27.38 | .767   | 19.48 | 5.00                   | 127.00 | 8.00                   | 203.20 |
| 14         | 1.141   | 28.98 | .767   | 19.48 | 5.00                   | 127.00 | 8.00                   | 203.20 |
| 16         | 1.266   | 32.16 | .767   | 19.48 | 5.00                   | 127.00 | 8.00                   | 203.20 |
| 18         | 1.375   | 34.93 | .767   | 19.48 | 5.00                   | 127.00 | 8.00                   | 203.20 |
| 20         | 1.510   | 38.35 | .767   | 19.48 | 5.00                   | 127.00 | 8.00                   | 203.20 |
| 22         | 1.625   | 41.28 | .767   | 19.48 | 5.00                   | 127.00 | 8.00                   | 203.20 |
| 24         | 1.760   | 44.70 | .767   | 19.48 | 5.00                   | 127.00 | 8.00                   | 203.20 |

\* Tolerances for lanyard Length  
inches :+/- .25  
millimeters: +6.35

**Table 2 CPA 602 Receptacle Cover Dimensions**

| SHELL SIZE | ØB MAX. |       | J MAX. |       | STD. LANYARD LENGTH 1* |        | STD. LANYARD LENGTH 2* |        |
|------------|---------|-------|--------|-------|------------------------|--------|------------------------|--------|
|            | in      | mm    | in     | mm    | in                     | mm     | in                     | mm     |
| 8          | .776    | 19.45 | .618   | 15.70 | 5.00                   | 127.00 | 8.00                   | 203.20 |
| 10         | .906    | 23.01 | .618   | 15.70 | 5.00                   | 127.00 | 8.00                   | 203.20 |
| 12         | 1.078   | 27.38 | .618   | 15.70 | 5.00                   | 127.00 | 8.00                   | 203.20 |
| 14         | 1.141   | 28.98 | .618   | 15.70 | 5.00                   | 127.00 | 8.00                   | 203.20 |
| 16         | 1.266   | 32.16 | .618   | 15.70 | 5.00                   | 127.00 | 8.00                   | 203.20 |
| 18         | 1.375   | 34.93 | .618   | 15.70 | 5.00                   | 127.00 | 8.00                   | 203.20 |
| 20         | 1.510   | 38.35 | .618   | 15.70 | 5.00                   | 127.00 | 8.00                   | 203.20 |
| 22         | 1.625   | 41.28 | .618   | 15.70 | 5.00                   | 127.00 | 8.00                   | 203.20 |
| 24         | 1.760   | 44.70 | .618   | 15.70 | 5.00                   | 127.00 | 8.00                   | 203.20 |

\* Tolerances for lanyard Length  
inches :+/- .25  
millimeters: +6.35

## Lanyard Options

S-Stainless steel Sash chain




B-Stainless Steel Bead Chain




G-Nylon Rope, Black




CF-Crimp Ferrule Option

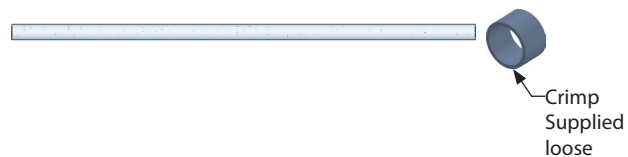



TR-Tie Wrap Option

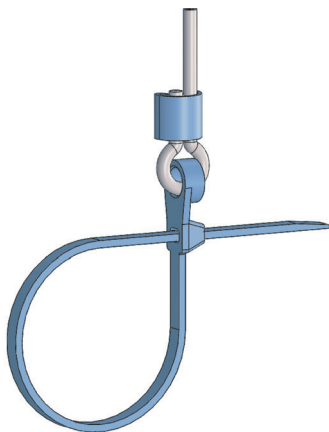

X-No Accessory

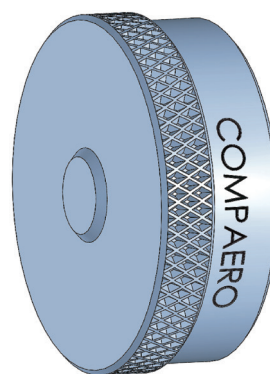


## Solid Rings

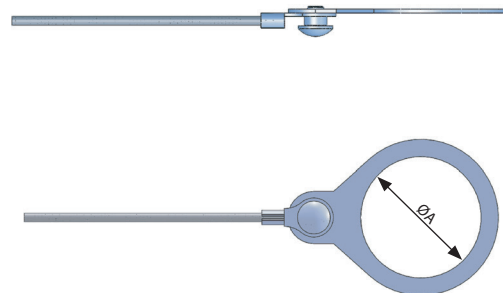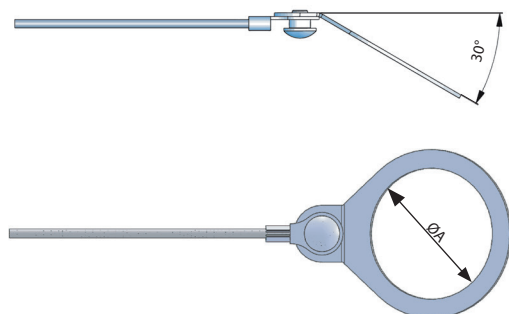

**Table 4** Ring Specification

| Ring | ØA    |       | Ring<br>30° | ØA    |       |
|------|-------|-------|-------------|-------|-------|
|      | in    | mm    |             | in    | mm    |
| 20   | .512  | 13.00 | 20A         | .512  | 13.00 |
| 21   | .591  | 15.01 | 21A         | .591  | 15.01 |
| 22   | .724  | 18.38 | 22A         | .724  | 18.38 |
| 23   | .787  | 20.00 | 23A         | .787  | 20.00 |
| 24   | .913  | 23.19 | 24A         | .913  | 23.19 |
| 25   | 1.043 | 26.49 | 25A         | 1.043 | 26.49 |
| 26   | 1.193 | 30.30 | 26A         | 1.193 | 30.30 |
| 27   | 1.283 | 32.58 | 27A         | 1.283 | 32.58 |
| 28   | 1.437 | 36.49 | 28A         | 1.437 | 36.49 |
| 29   | 1.547 | 39.29 | 29A         | 1.547 | 39.29 |
| 30   | 1.689 | 42.90 | 30A         | 1.689 | 42.90 |
| 31   | 1.772 | 45.00 | 31A         | 1.772 | 45.00 |
| 32   | 1.890 | 48.00 | 32A         | 1.890 | 48.00 |
| 33   | 2.140 | 54.40 | 33A         | 2.140 | 54.40 |
| 34   | 2.406 | 61.10 | 34A         | 2.406 | 61.10 |
| 35   | 2.656 | 67.50 | 35A         | 2.656 | 67.50 |

## Eyelet

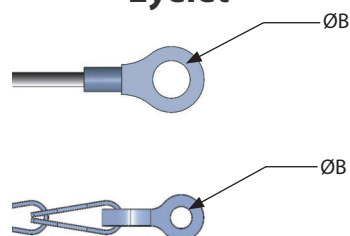

**Table 3** Eyelet Specifications

| Eyelet | ØB                |
|--------|-------------------|
| 00     | No Eyelet or Ring |
| 01     | 0.140             |
| 02     | 0.167             |
| 03     | 0.197             |
| 04     | 0.125             |
| 05     | 0.156             |
| 06     | 0.182             |
| 07     | 0.191             |
| 08     | 0.218             |