




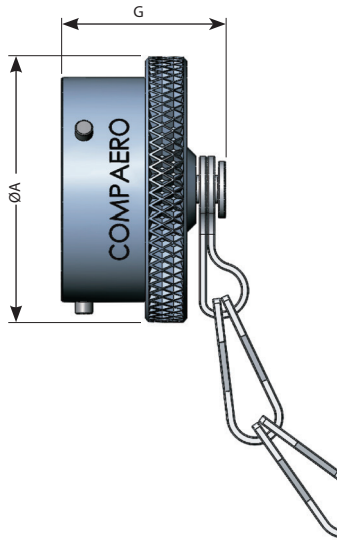

CPA 80 - Plug Cover

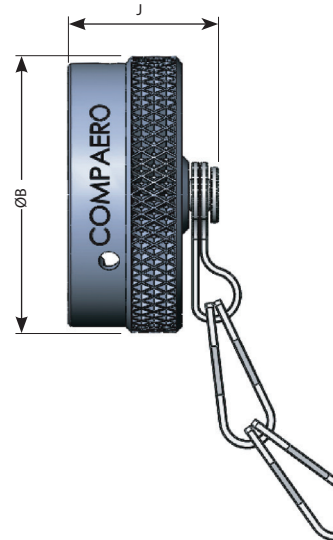

CPA 81 - Receptacle Cover

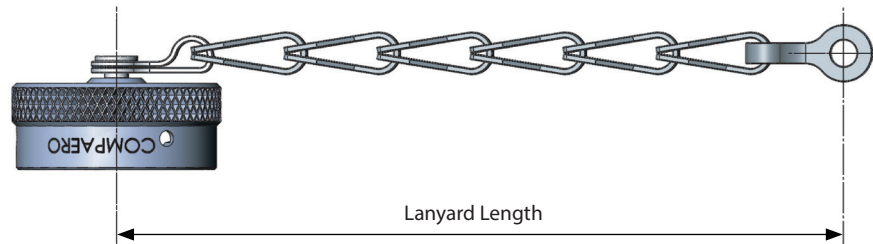

CPA 81-12 W-S5-22

Compaero Identifier

Series Identifier

80: MIL-DTL-26482 PLUG
81: MIL-DTL-26482 RECEPTACLE

Shell Size

Finish & Material

See Page 5

Eyelet or Ring Size

See Page 9

Enter "00" for a lanyard and length as specified with no eyelet or ring attached
(Suffix A for 30" Ring)

Lanyard Length in Inches (0.25" Increments Only)

For 5 Inches use "5"

For 4.5 Inches use "4.5"

For 4.25 Inches use "4.25"

Lanyard Style

X - No accessory

S - Stainless Steel Sash Chain

G - Nylon Rope, Black

GW - Nylon Rope, Green

Y - Stainless Steel Wire Rope, Nylon Jacket

T - Stainless Steel Wire Rope, Teflon Jacket

R - Stainless Steel Wire Rope, PVC Jacket

CF - Crimp Ferrule Option

TR - Tie-Wrap Option

B - Stainless Steel Bead Chain

(See Page 8)

Table 1 CPA 80 Plug Cover Dimensions

SHELL SIZE	ØA MAX.		G MAX.		STD. LANYARD LENGTH*	
	in	mm	in	mm	in	mm
08	.719	18.26	.781	19.84	3.0	76.20
10	.844	21.44	.781	19.84	3.0	76.20
12	1.000	25.40	.781	19.84	3.5	88.90
14	1.125	28.58	.781	19.84	3.5	88.90
16	1.250	31.75	.781	19.84	3.5	88.90
18	1.375	34.92	.781	19.84	3.5	88.90
20	1.500	38.10	.844	21.44	4.0	101.60
22	1.625	41.28	.844	21.44	4.0	101.60
24	1.750	44.45	.875	22.22	4.0	101.60

* Tolerances for lanyard Length
inches :+.50/- .25
millimeters: +12.70/-6.35

Table 2 CPA 81 Receptacle Cover Dimensions

SHELL SIZE	ØB MAX.		J MAX.		STD. LANYARD LENGTH*	
	in	mm	in	mm	in	mm
08	.734	18.64	.844	21.44	3.0	76.20
10	.859	21.82	.844	21.44	3.0	76.20
12	1.000	25.40	.844	21.44	3.5	88.90
14	1.125	28.58	.844	21.44	3.5	88.90
16	1.250	31.75	.844	21.44	3.5	88.90
18	1.375	34.92	.844	21.44	3.5	88.90
20	1.500	38.10	.844	21.44	4.0	101.60
22	1.625	41.28	.844	21.44	4.0	101.60
24	1.750	44.45	.875	22.22	4.0	101.60

* Tolerances for lanyard Length
inches :+.50/- .25
millimeters: +12.70/-6.35

Lanyard Options

S-Stainless steel Sash chain




B-Stainless Steel Bead Chain




G-Nylon Rope, Black




CF-Crimp Ferrule Option

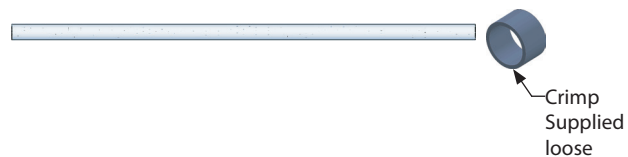

TR-Tie Wrap Option

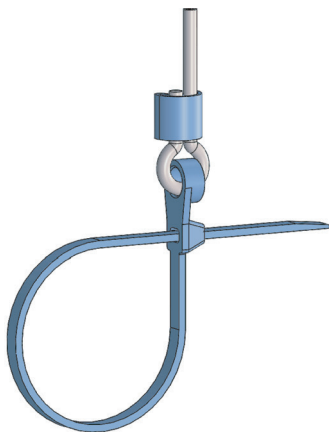

X-No Accessory

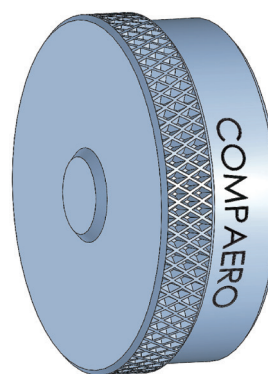

Solid Rings

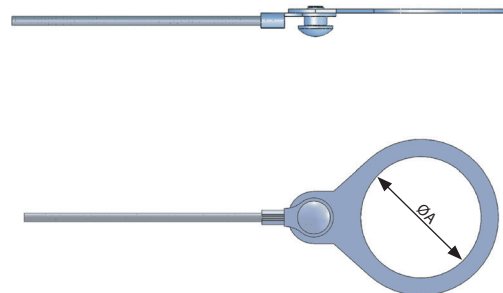
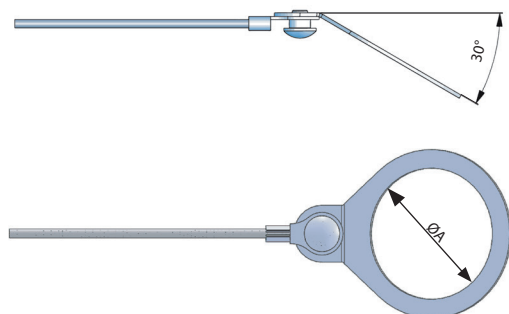


Table 4 Ring Specification

Ring	$\varnothing A$		Ring 30°	$\varnothing A$	
	in	mm		in	mm
20	.512	13.00	20A	.512	13.00
21	.591	15.01	21A	.591	15.01
22	.724	18.38	22A	.724	18.38
23	.787	20.00	23A	.787	20.00
24	.913	23.19	24A	.913	23.19
25	1.043	26.49	25A	1.043	26.49
26	1.193	30.30	26A	1.193	30.30
27	1.283	32.58	27A	1.283	32.58
28	1.437	36.49	28A	1.437	36.49
29	1.547	39.29	29A	1.547	39.29
30	1.689	42.90	30A	1.689	42.90
31	1.772	45.00	31A	1.772	45.00
32	1.890	48.00	32A	1.890	48.00
33	2.140	54.40	33A	2.140	54.40
34	2.406	61.10	34A	2.406	61.10
35	2.656	67.50	35A	2.656	67.50

Eyelet

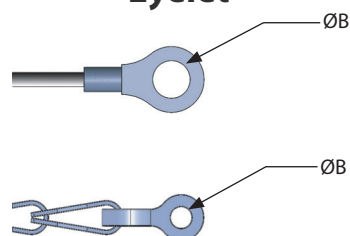


Table 3 Eyelet Specifications

Eyelet	$\varnothing B$
00	No Eyelet or Ring
01	0.140
02	0.167
03	0.197
04	0.125
05	0.156
06	0.182
07	0.191
08	0.218