


SERIES 46 - EMI/RFI ADAPTER

Solid Backshell, Elliptical Entry, 45 Degree Left/Right
MIL-DTL-83513 Style

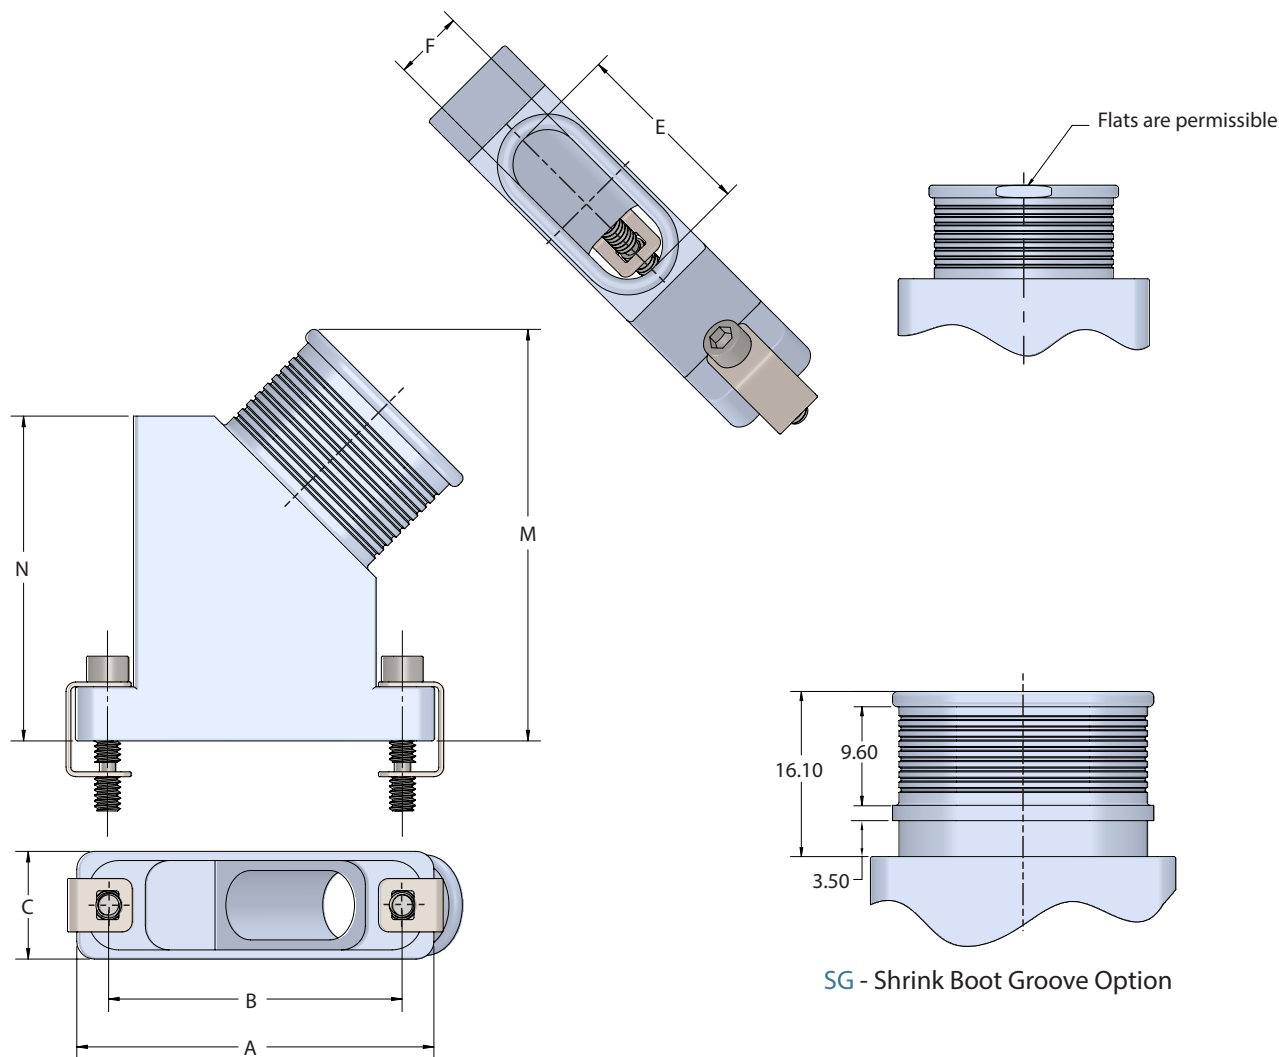

SG - Shrink Boot Groove Option

CP RM 46 3 N - W E - 15 04 -25 -NH - SG

Compaero Identifier	CP	RM	46	3	N	-	W	E	-	15	04	-	25	-	NH	-	SG
Interface Code RM - MIL-DTL-83513 Style																	
Series 46 - Band Lock																	
Angle Code 3 - 45 Degree Left/Right																	
Backshell Style N - One Piece, Solid																	
Material & Finish F - Electroless Nickel, Aluminium W - Cadmium Olive Drab, Aluminium K - Stainless steel, Passivate See Page 4 for additional options																	
Shrink Boot Groove Option Omit for no shrink boot groove																	
Hardware Options See Table 3 for options																	
Length Dimension N (1 mm increments from standard minimum length). Standard minimum length listed in Table 2 (Dim N) e.g. "25" would replace standard minimum length in Table 2 (Dim N) with 25 mm																	
Entry Size See Table 2																	
Shell Size See Table 1																	
Entry Style E - Elliptical Entry																	

SERIES 46 - EMI/RFI ADAPTER

Solid Backshell, Elliptical Entry, 45 Degree Left/Right
MIL-DTL-83513 Style




Table 1 Shell Size

SHELL SIZE	A	B	C	MAX ENTRY
09	19.68	14.35	9.0	04
15	23.50	18.16	9.0	05
21	27.30	21.97	9.0	06
25	29.84	24.51	9.0	07
31	33.66	28.32	9.0	07
37	37.46	32.13	9.0	08
51	36.20	30.86	10.0	08
100	54.86	45.72	11.0	11

Table 2 Entry Size

ENTRY SIZE	E	F	N MIN	M MIN
04	7.0	5.8	21.02	28.56
05	10.8	5.8	23.89	31.25
06	15.2	5.8	27.00	34.21
07	17.9	6.5	30.47	37.83
08	22.8	6.8	34.12	40.61
09	26.0	7.4	35.95	42.66
11	35.8	8.4	41.57	48.93

Table 3 Hardware Options

ORDERING CODE	DESCRIPTION
MSL	Slotted Head Screw (2)
MSK	Socket Head Screw (2)
NH	No Hardware

Tolerance
Linear ± 0.25 mm
Angular $\pm 1^\circ$