



# SERIES 55


Cable Clamp Adapter Non-Environmental, Non-Screened




## Angle 1 - Straight Rotatable Coupling, Type A Clamp

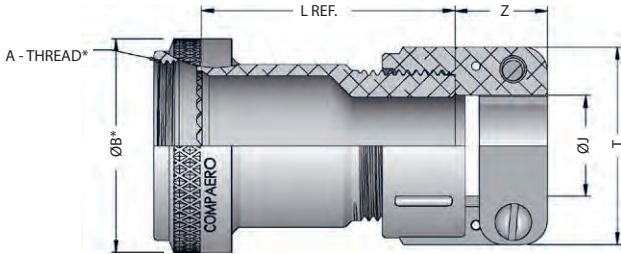


## Clamp Option - Type H Clamp

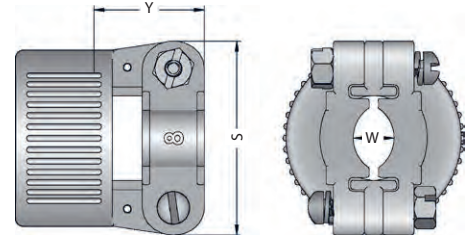


## Angle 4 - 45 Degree

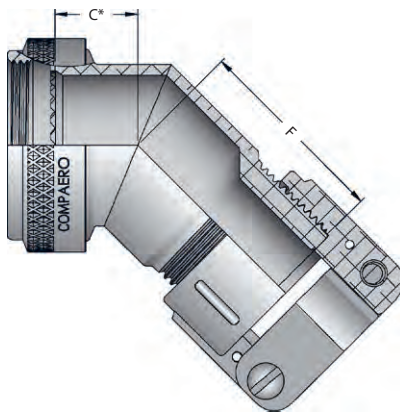

## Angle 8 - 90 Degree

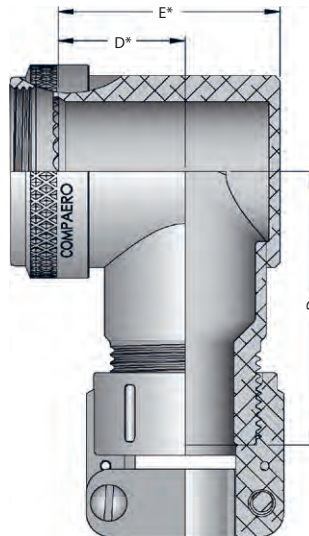

## Angle 9 - 90 Degree Miter Cut

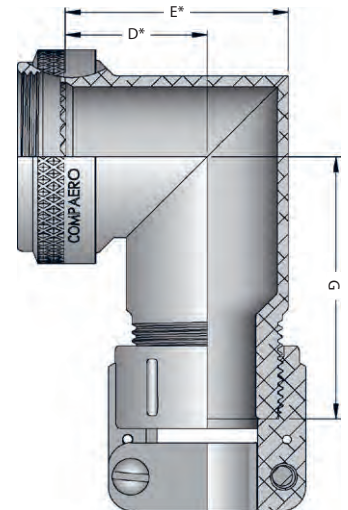

### CP A 55 1 W D - 12 03 H - 10

**Compaero Identifier**

**Connector Interface**  
See page 6 for details

**Series Identifier**

**Angle**

**Material & Finish**  
See page 7 for details

**Coupling Ring Option**  
Omit for standard rotatable

- D** - Direct coupling
- E** - Seat-lock (Non-detent, self locking)
- S** - Self locking (Detent, ratchet style)
- T** - Safety wire holes
- W** - Wrench flats  
See page 8 for details

**Length Option**

Omit for 1.50" (Standard) & angled parts  
0.25" Increments (10 = 2.50")

**Cable Clamp Type**

- A** - MS3057A (shown in drawings)
- H** - MS3057D

**Cable Clamp Size**

See table 2&3

**Shell Size**

See table 1

\* Refer to interface tables in pages 43 & 44  
**inches** [millimeters]



**Table 1** Shell Size

SHELL SIZE	F MAX	G MAX
	in mm	in mm
08/09	<b>0.88</b> 22.4	<b>1.17</b> 29.7
10/11	<b>0.91</b> 23.1	<b>1.23</b> 31.2
12/13	<b>0.93</b> 23.6	<b>1.29</b> 32.8
14/15	<b>0.96</b> 24.4	<b>1.35</b> 34.3
16/17	<b>0.98</b> 24.9	<b>1.42</b> 36.1
18/19	<b>1.00</b> 25.4	<b>1.45</b> 36.8
20/21	<b>1.02</b> 25.9	<b>1.51</b> 38.4
22/23	<b>1.05</b> 26.7	<b>1.57</b> 39.9
24/25	<b>1.07</b> 27.2	<b>1.63</b> 41.4
28/29	<b>1.10</b> 27.9	<b>1.70</b> 43.2
32/33	<b>1.15</b> 29.2	<b>1.82</b> 46.2
36	<b>1.19</b> 30.2	<b>1.92</b> 48.8
40	<b>1.24</b> 31.5	<b>2.04</b> 51.8
44	<b>1.29</b> 32.8	<b>2.17</b> 55.1
48	<b>1.35</b> 34.3	<b>2.29</b> 58.2
61	<b>1.06</b> 26.9	<b>1.60</b> 40.6

**Table 2** Type A Clamp

ENTRY CODE	CLAMP REF	ØJ	T MAX	W REF	Z MAX
		in mm	in mm	in mm	in mm
01	CP3057-3A	<b>0.250</b> 6.4	<b>0.84</b> 21.4	<b>0.16</b> 4.0	<b>0.45</b> 11.5
02	CP3057-4A	<b>0.312</b> 7.9	<b>0.91</b> 23.0	<b>0.19</b> 4.8	<b>0.45</b> 11.5
03	CP3057-6A	<b>0.438</b> 11.1	<b>1.09</b> 27.8	<b>0.28</b> 7.1	<b>0.52</b> 13.1
04	CP3057-8A	<b>0.563</b> 14.3	<b>1.19</b> 30.1	<b>0.34</b> 8.7	<b>0.58</b> 14.7
05	CP3057-10A	<b>0.625</b> 15.9	<b>1.28</b> 32.5	<b>0.38</b> 9.5	<b>0.58</b> 14.7
06	CP3057-12A	<b>0.750</b> 19.1	<b>1.50</b> 38.1	<b>0.44</b> 11.1	<b>0.58</b> 14.7
07	CP3057-16A	<b>0.938</b> 23.8	<b>1.72</b> 43.7	<b>0.56</b> 14.3	<b>0.67</b> 17.1
08	CP3057-20A	<b>1.250</b> 31.8	<b>2.06</b> 52.4	<b>0.75</b> 19.1	<b>0.67</b> 17.1
09	CP3057-24A	<b>1.375</b> 34.9	<b>2.31</b> 58.7	<b>0.78</b> 19.8	<b>0.67</b> 17.1
10	CP3057-28A	<b>1.625</b> 41.3	<b>2.72</b> 69.1	<b>0.97</b> 24.6	<b>1.20</b> 30.6
11	CP3057-32A	<b>1.875</b> 47.6	<b>2.97</b> 75.4	<b>1.13</b> 28.6	<b>1.20</b> 30.6

**Table 3** Type H Clamp

ENTRY CODE	CLAMP REF	ØJ	S MAX	W REF	Y MAX
		in mm	in mm	in mm	in mm
02	CP3057-4D	<b>0.313</b> 7.9	<b>0.96</b> 24.3	<b>0.17</b> 4.2	<b>0.78</b> 19.8
03	CP3057-6D	<b>0.438</b> 11.1	<b>1.15</b> 29.1	<b>0.29</b> 7.3	<b>0.78</b> 19.8
04	CP3057-8D	<b>0.563</b> 14.3	<b>1.33</b> 33.8	<b>0.34</b> 8.7	<b>0.78</b> 19.8
05	CP3057-10D	<b>0.625</b> 15.9	<b>1.33</b> 33.8	<b>0.37</b> 9.5	<b>0.78</b> 19.8
06	CP3057-12D	<b>0.750</b> 19.1	<b>1.55</b> 39.4	<b>0.52</b> 13.2	<b>0.81</b> 20.6
07	CP3057-16D	<b>0.938</b> 23.8	<b>1.77</b> 45.0	<b>0.64</b> 16.3	<b>0.91</b> 23.0
08	CP3057-20D	<b>1.250</b> 31.8	<b>2.11</b> 53.7	<b>0.86</b> 21.7	<b>1.09</b> 27.7
09	CP3057-24D	<b>1.375</b> 34.9	<b>2.36</b> 60.0	<b>0.99</b> 25.1	<b>1.12</b> 28.5
10	CP3057-28D	<b>1.625</b> 41.3	<b>2.77</b> 70.4	<b>1.26</b> 32.1	<b>1.40</b> 35.5
11	CP3057-32D	<b>1.875</b> 47.6	<b>3.02</b> 76.7	<b>1.42</b> 36.0	<b>1.40</b> 35.5

inches millimeters  
Tolerance ±0.01±0.25