
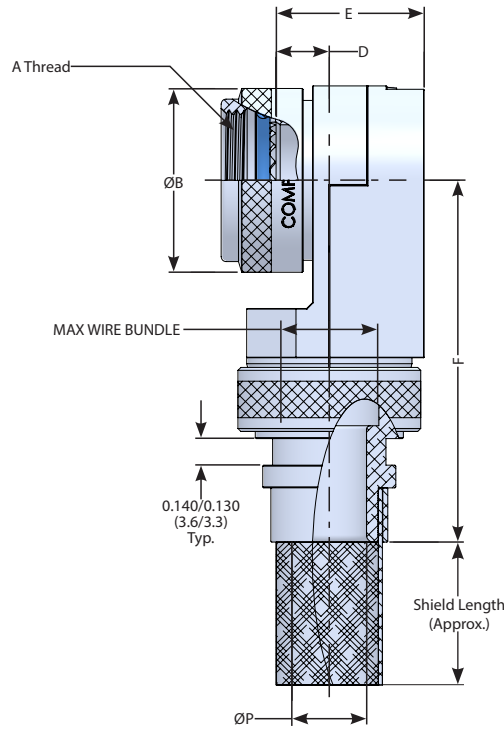


**Series 35- Shield Sock Shrink Boot Adapter, Standard Rotatable Coupling**

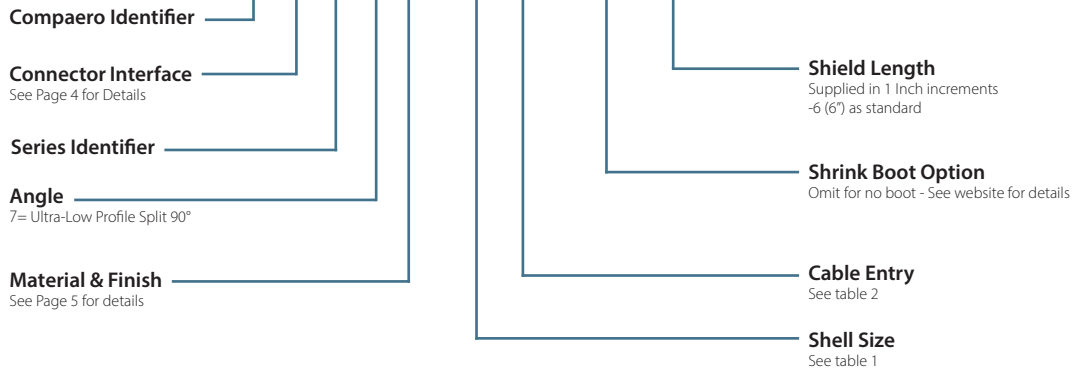

**CP A 35 7 W - 12 03 - VG0 - 6**





**Table 1** Shell Size

SHELL SIZE	F MAX		D REF.		E MAX		MAX WIRE BUNDLE	
	in	mm	in	mm	in	mm	in	mm
08/09	1.780	45.2	0.340	8.6	0.681	17.3	0.250	6.4
10/11	1.940	49.3	0.270	6.9	0.731	18.6	0.375	9.5
12/13	1.940	49.3	0.270	6.9	0.731	18.6	0.375	9.5
14/15	2.010	51.1	0.280	7.1	0.831	21.1	0.500	12.7
16/17	2.060	52.3	0.420	10.7	0.981	24.9	0.625	15.9
18/19	2.090	53.1	0.640	16.3	1.181	30.0	0.625	15.9
20/21	2.090	53.1	0.640	16.3	1.181	30.0	0.625	15.9
22/23	2.240	56.9	0.540	13.7	1.181	30.0	0.750	19.1
24/25	2.240	56.9	0.540	13.7	1.181	30.0	0.750	19.1

**Table 2** Entry Size

ENTRY	ØP	
	in	mm
01	0.125	3.2
31	0.188	4.8
02	0.250	6.4
32	0.312	7.9
03	0.375	9.5
33	0.438	11.1
04	0.500	12.7
34	0.562	14.3
05	0.625	15.9
35	0.688	17.5
06	0.750	19.1

inches millimeters  
Tolerance ±0.015±0.4

**Table 3** Interface Data

A INTERFACE		
SHELL SIZE	A THREAD	ØB MAX
		in mm
08	1/2-20 UNF	0.65 16.5
10	5/8-24 UNEF	0.77 19.6
12	3/4-20 UNEF	0.94 23.9
14	7/8-20 UNEF	1.02 25.9
16	1-20 UNEF	1.21 30.7
18	1 1/16-18 UNEF	1.23 31.2
20	1 3/16-18 UNEF	1.36 34.5
22	1 5/16-18 UNEF	1.48 37.6
24	1 7/16-18 UNEF	1.73 43.9

F INTERFACE		
SHELL SIZE	A THREAD	ØB MAX
		in mm
08	7/16-28 UNEF	0.65 16.5
10	9/16-24 UNEF	0.77 19.6
12	11/16-24 UNEF	0.89 22.6
14	13/16-20 UNEF	1.02 29.2
16	15/16-20 UNEF	1.15 29.2
18	1 1/16-18 UNEF	1.23 31.2
20	1 3/16-18 UNEF	1.36 34.5
22	1 5/16-18 UNEF	1.48 37.6
24	1 7/16-18 UNEF	1.73 43.9

H INTERFACE		
SHELL SIZE	A THREAD	ØB MAX
		in mm
09	M12x1.0 - 6 H	0.77 19.6
11	M15x1.0 - 6 H	0.82 20.8
13	M18x1.0 - 6 H	0.94 23.9
15	M22x1.0 - 6 H	1.07 26.2
17	M25x1.0 - 6 H	1.21 30.7
19	M28x1.0 - 6 H	1.36 34.5
21	M31x1.0 - 6 H	1.48 37.6
23	M34x1.0 - 6 H	1.60 40.6
25	M37x1.0 - 6 H	1.70 43.2